CLEAR SPAN **BUILDINGS**

STATES: AR, CO, IA, IN, KS, MI, MO, NE, OK, WI

CERTIFIED
50PSF/127MPH

TRI-STATE CARPORTS
Est:1999

Vertical Roof

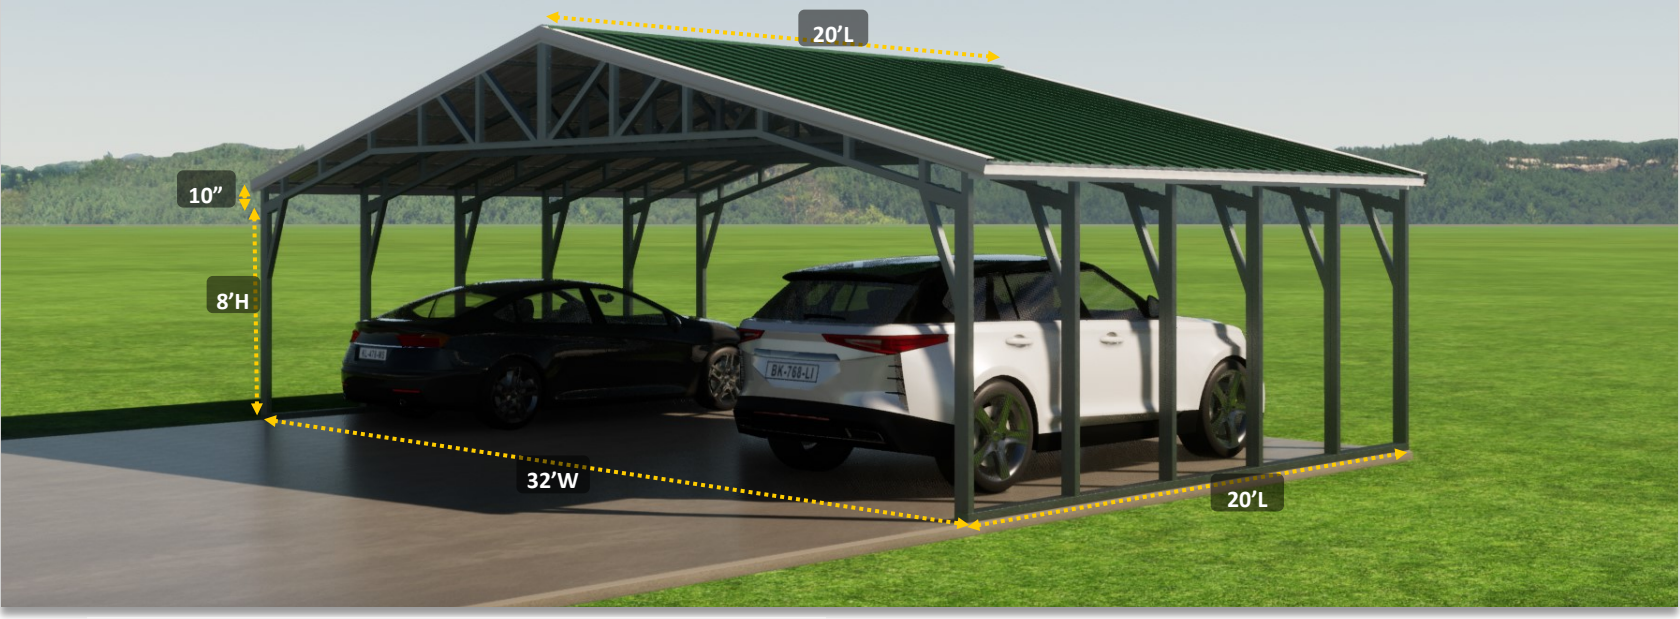

WXL	32'-40'W VERTICAL ROOF STYLE						
32x20X8 **$15,084**	32x25X8 **$16,508**	32x30X8 **$18,243**	32x35X8 **$21,036**	32x40X8 **$23,681**	32x45X8 **$26,327**	32x50X8 **$29,072**
34x20X8 **$16,178**	34x25X8 **$17,583**	34x30X8 **$19,236**	34x35X8 **$22,130**	34x40X8 **$25,004**	34x45X8 **$27,915**	34x50X8 **$30,725**
36x20X8 **$17,169**	36x25X8 **$18,573**	36x30X8 **$20,310**	36x35X8 **$23,351**	36x40X8 **$26,327**	36x45X8 **$29,402**	36x50X8 **$32,462**
38x20X8 **$20,127**	38x25X8 **$21,549**	38x30X8 **$23,286**	38x35X8 **$26,756**	38x40X8 **$30,293**	38x45X8 **$33,782**	38x50X8 **$37,338**
40x20X8 **$22,691**	40x25X8 **$24,195**	40x30X8 **$25,848**	40x35X8 **$29,732**	40x40X8 **$33,701**	40x45X8 **$37,668**	40x50X8 **$41,535**

INSULATION ADD ON ROOF ONLY: Add 2' to width and multiply by length.
EX. 32' wide x 20' long (34x20= 680 sf x rate =$ 1,700.00)

Standard Features Include:

14 Gauge frame, 8ft Std legs, 29 Gauge roofing, maximum rafter/ column spacing 4' on center or less, web truss design, double leg and rail system on all heights. Customer must supply lull lift for all building sizes.

(MUST ADD GROUND PACKAGE TO ALL SIZES IF BUILDING/S ARE INSTALLED ON ANY SURFACE OTHER THAN CONCRETE)

- Free Installation On Your Level Lot
- Financing Available / Rent To Own Available
- Engineer Plans Available Call 877-494-2997
- Rebar Anchors Included /Concrete Anchors Included
- Note: Frame Lengths Are 20',25',30' Etc. Vertical Roofs Have No Overhang Front Or Back.

***20L-6 rafters 48" oc**
***25L-8 rafters 42.86" oc**
***30L-9 rafters 45" oc**
***35L-10 rafters 46.67" oc**
***40L-11 rafters 48" oc**
***45L-13 rafters 45" oc**
***50L-14 rafters 46.15" oc**

***30 Day Workmanship warranty** on all Buildings, effective day of Installation.
***20 Year limited warranty** on 12 Gauge framing materials assuming regular care and maintenance given to building.

We strongly recommend you to purchase vertical roofs on buildings 31ft or longer to prevent leaks.

2022 V1

CUSTOMER MUST SUPPLY LULL LIFT FOR INSTALLATION FOR ALL BUILDING SIZES.

"ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE"

©2022 Copyright All Rights Reserved Tri State Carports, Inc

Beckers Paint

Leg Height	20' Long	25' Long	30' Long	35' Long	40' Long	45' Long	50' Long
8' Tall Standard							
9 Ft Tall	$357	$432	$507	$582	$657	$732	$807
10 Ft Tall	$732	$882	$1,032	$1,182	$1,332	$1,482	$1,632
11 Ft Tall	$1,107	$1,332	$1,557	$1,782	$2,007	$2,232	$2,457
12 Ft Tall	$1,482	$1,782	$2,082	$2,382	$2,682	$2,982	$3,282
13 Ft Tall	$1,857	$2,232	$2,607	$2,982	$3,357	$3,732	$4,107
14 Ft Tall	$2,232	$2,682	$3,132	$3,582	$4,032	$4,482	$4,932
15 Ft Tall	$2,607	$3,132	$3,657	$4,182	$4,707	$5,232	$5,757
16 Ft Tall	$2,982	$3,582	$4,182	$4,782	$5,382	$5,982	$6,582

12G FRAME UPGRADE		GROUND PACKAGE
20' LONG	$936	$360
25' LONG	$1,116	$480
30' LONG	$1,296	$540
35' LONG	$1,476	$600
40' LONG	$1,656	$660
45' LONG	$1,836	$780
50' LONG	$2,016	$840

GROUND PACKAGE CONSISTS OF ADDING MHA OR ASPHALT ANCHORS ON EVERY LEG TO MEET WIND LOAD OF 127MPH

CLOSE BOTH SIDES (STD VERTICAL SIDING)								CLOSE ONE END (STD VERTICAL SIDING) End bars 4' OC or less				
Leg Height	20' Long	25' Long	30' Long	35' Long	40' Long	45' Long	50' Long	32'Wide	34' Wide	36' Wide	38' Wide	40' Wide
8 Ft Tall	$1,580	$1,934	$2,309	$2,703	$3,119	$3,351	$3,707	$3,657	$3,938	$4,220	$4,500	$4,782
9 Ft Tall	$1,712	$2,106	$2,522	$2,957	$3,413	$3,656	$4,050	$3,929	$4,209	$4,491	$4,772	$5,054
10 Ft Tall	$1,853	$2,289	$2,744	$3,221	$3,716	$3,980	$4,415	$4,200	$4,482	$4,763	$5,045	$5,325
11 Ft Tall	$2,198	$2,724	$3,270	$3,837	$4,425	$4,760	$5,286	$4,472	$4,754	$5,034	$5,316	$5,597
12 Ft Tall	$2,349	$2,916	$3,504	$4,112	$4,739	$5,103	$5,866	$4,745	$5,025	$5,307	$5,588	$5,870
13 Ft Tall	$2,501	$3,108	$3,737	$4,385	$5,052	$5,448	$6,056	$5,016	$5,297	$5,579	$5,859	$6,141
14 Ft Tall	$2,663	$3,311	$3,980	$4,668	$5,570	$5,813	$6,461	$5,288	$5,570	$5,766	$6,132	$6,413
15 Ft Tall	$3,027	$3,767	$4,526	$5,306	$6,105	$6,632	$7,371	$5,559	$5,841	$6,038	$6,404	$6,684
16 Ft Tall	$3,189	$3,929	$4,688	$5,468	$6,267	$6,794	$7,533	$5,832	$6,113	$6,309	$6,675	$6,957

INSULATION (BOTH SIDES) ADD ON:
Multiply leg height by length by 2.
EX. 20' long x 8' tall 8x20= 160 sf x 2 =320 sf x 2.50 = $800.00 both sides

INSULATION (PER END) ADD ON:
Add 3' to leg height multiply by width
EX. 32' wide x 8' tall 11x32= 352 sf x 2.50 = $880.00 per end

CONCRETE DIMENSIONS
In reference to frame size Ex. 32'Wx20'L building frame size. Make pad 32'8"Wx20'8"L. the extra 4" all around make it slope away from the building edge to run off water.

Labor Fees	20'L	25'L	30'L	35'L	40'L	45'L	50'L
Build over fee	$200	$250	$300	$350	$400	$450	$500
Cut legs on site	$250	$300	$350	$400	$450	$500	$550

Add $100.00 Trip Fee on any purchase less than $500.00

Connection fees valid only if you are purchasing 2 buildings at the same time (not on existing buildings)

Connecting end to end. $200.00
Connecting side to side. $250.00

EXTRA FRAME BOW	WINDOWS white with grids	GARAGE DOORS	*GABLE END (VERTICAL)
32'-40' WIDE $1,440 EA.	24"X36" $190.00 EA.	6'WX6'H $504.00 EA.	32'-40' WIDE $864 EA.
ADD $30.00 FOR EACH ADDITIONAL HEIGHT.		8'WX7'H $648.00 EA.	*CARPORT PEAK ENCLOSED
MOBILE HOME ANCHORS / ASPHALT ANCHORS		9'WX7'H $720.00 EA.	**EXTENDED GABLE(VERTICAL)
3/4"X30" $30.00 EA. / 3/4"X30" $30.00 EA.		10'WX8'H $792.00 EA.	32'-40' WIDE $1,296.00 EA.
WALK IN DOOR left outswing	EXTRA PANELS 36" wide	10'WX10'H $864.00 EA.	
36"X80" $315.00 EA.	21' LONG $130.00 EA. *36' LONG $216.00 EA.	12'WX12'H $2,304.00 EA.	
ADD $50.00 SIDE FEE (IF FRAME HEADER BAR IS NEEDED ADD $100)	26' LONG $158.00 EA. *41' LONG $259.00 EA.	ADD $100.00 SIDE DOOR FEE (PER EACH DOOR) BUILDING MUST BE 1' TALLER TO INSTALL DOOR ON SIDE.	**GABLE PLUS 3' PANEL
BUILDING MUST BE A MIN OF 7FT TALL TO INSTALL DOOR ON SIDE.	31' LONG $187.00 EA. *NOT A CONTINUOUS PANEL.	4 EXTRA SUPPORTS	
EXTRA L TRIM	EXTRA J TRIM	**45° TRIM KIT**	
$1.25 (PER FT)	$1.12 (PER FT)	$99.00 EA. MUST CLOSE END OR SIDE FIRST.	RECOMMENDED 10-12' TALL ON CONCRETE OR GROUND. $400.00

FRAME OUTS	WINDOW $80.00 EACH WALK DOOR $90.00 EACH	**DOOR FRAME OUTS**	6'W-12'W ON END $200.00 EACH 13'W-16'W ON END $400.00 EACH 6'W-12'W ON SIDE $600.00 EACH 13'W-16'W ON SIDE $900.00 EACH	16FT WIDE MAX ON END AND SIDE DOOR OPENINGS	ON ENDS: MUST CLOSE FIRST FOR FRAME OUTS, IF NO PANELS WANTED ON END (FRAME END ONLY) DISCOUNT 20% FROM CLOSED END PRICE.


Double leg system

Reflective Insulation

Walk in door


Roll up door

Window


Extra support
2 Under Ground


45° Trim Kits


Gable end

©2022 Copyright All Rights Reserved Tri State Carports, Inc

2022 V1